

Seqrite Endpoint Protection 6.5

Deploying EPP Agent through ManageEngine
Installation Steps

Copyright Information

Copyright © 2018–2026 Quick Heal Technologies Ltd. All Rights Reserved.

No part of this publication may be reproduced, duplicated, or modified in any form or incorporated into any information retrieval system, electronic or any other media or transmitted in any form without prior permission of Quick Heal Technologies Limited, Solitaire Business Hub, Office No.7010 C & D, 7th Floor, Viman Nagar, Pune 411014, Maharashtra, India.

Marketing, distribution or use by anyone barring the people authorized by Quick Heal Technologies Ltd. is liable to legal prosecution.

Trademarks

Seqrite and DNAScan are registered trademarks of Quick Heal Technologies Ltd. while Microsoft and Windows are registered trademarks of Microsoft Corporation. Other brands and product titles are trademarks of their respective holders.

License Terms

Installation and usage of Seqrite Endpoint Protection is subject to user's unconditional acceptance of the Seqrite end-user license terms and conditions.

To read the license terms, visit <https://www.seqrite.com/eula> and check the End-User License Agreement for your product.

Contents

- 1. Overview 2
- 2. Audience 2
- 3. Prerequisites/System Requirements 2
- 4. Installation Steps 3
- 5. Windows 3
- 6. Mac 6
- 7. Linux..... 11

Overview

This document guides you with the steps to deploy Endpoint Protection clients using ManageEngine. Note that the steps mentioned in this document are one of the ways to deploy EPP client. While deploying, you can configure the settings to suit your requirement.

Audience

This guide is useful for the Seqrite support or customer/partner system administrators who would be carrying out the deployment.

Prerequisites/System Requirements

- ManageEngine - Install Agent should be deployed on the endpoints.

Installation Steps

Windows

Windows Client


Follow these steps to download Windows client package:

1. Log in to EPP Console.
2. Go to the **Deployment** page.
3. Download the Windows Client installer (without AV) build package (Windows 32/64) from the Deployment page. These builds will be in the ZIP format.
4. Extract the .zip file containing **clagnt.dat** and **clagnt64.exe** files.


Windows Client Deployment with ManageEngine

Follow these steps to deploy Windows client using the Custom Script method:


1. Log in to the ManageEngine Endpoint Central Console.
2. Go to **Configuration > Windows**.

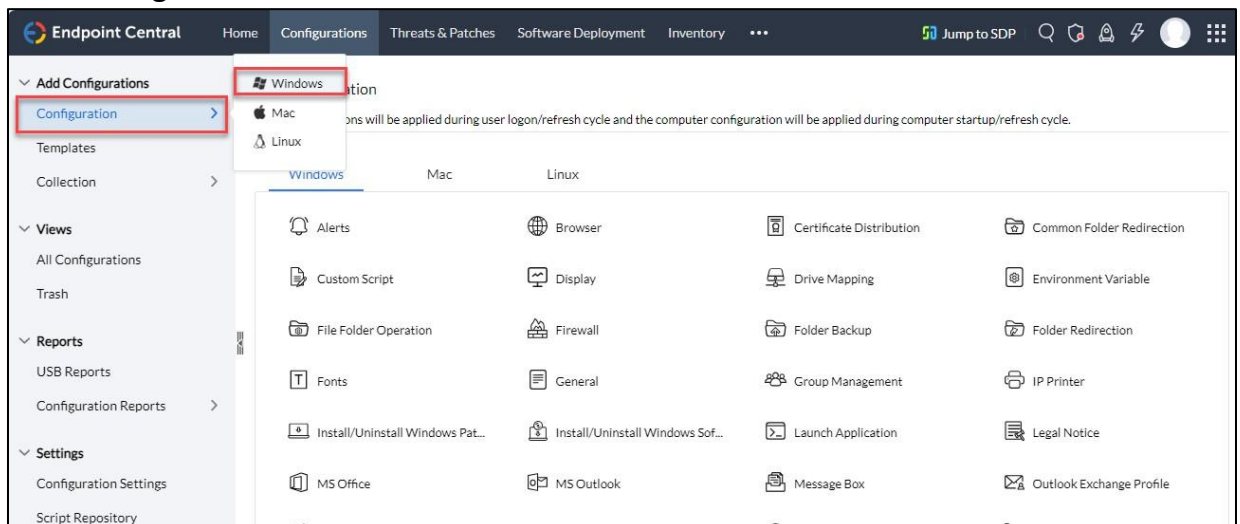

3. On Add Configuration page, click Custom Scripts.

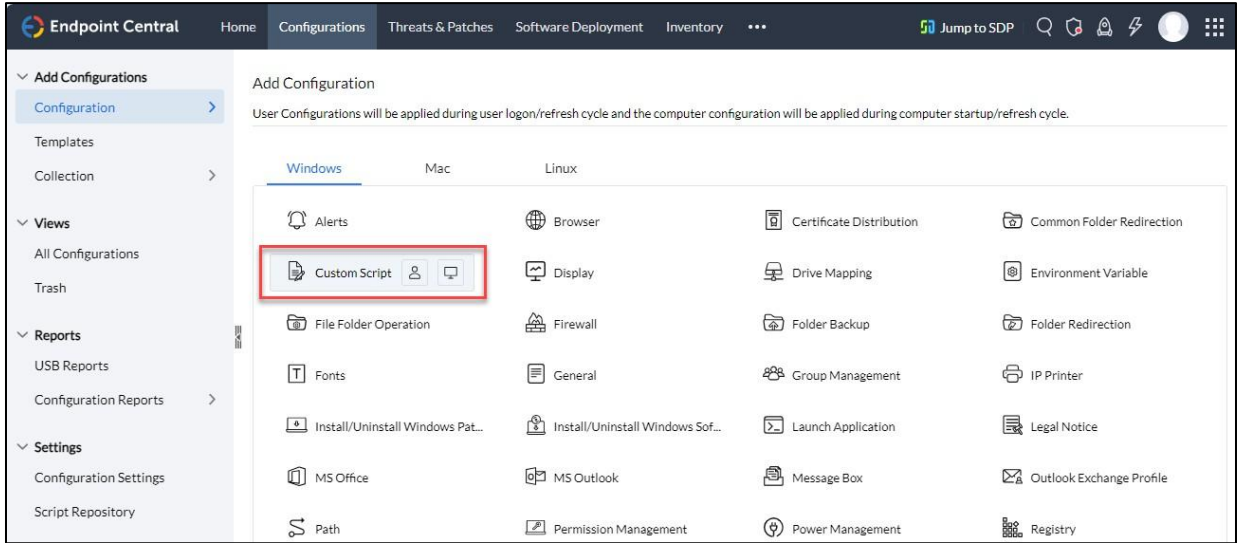

4. The Custom Script page opens. Provide the following details:

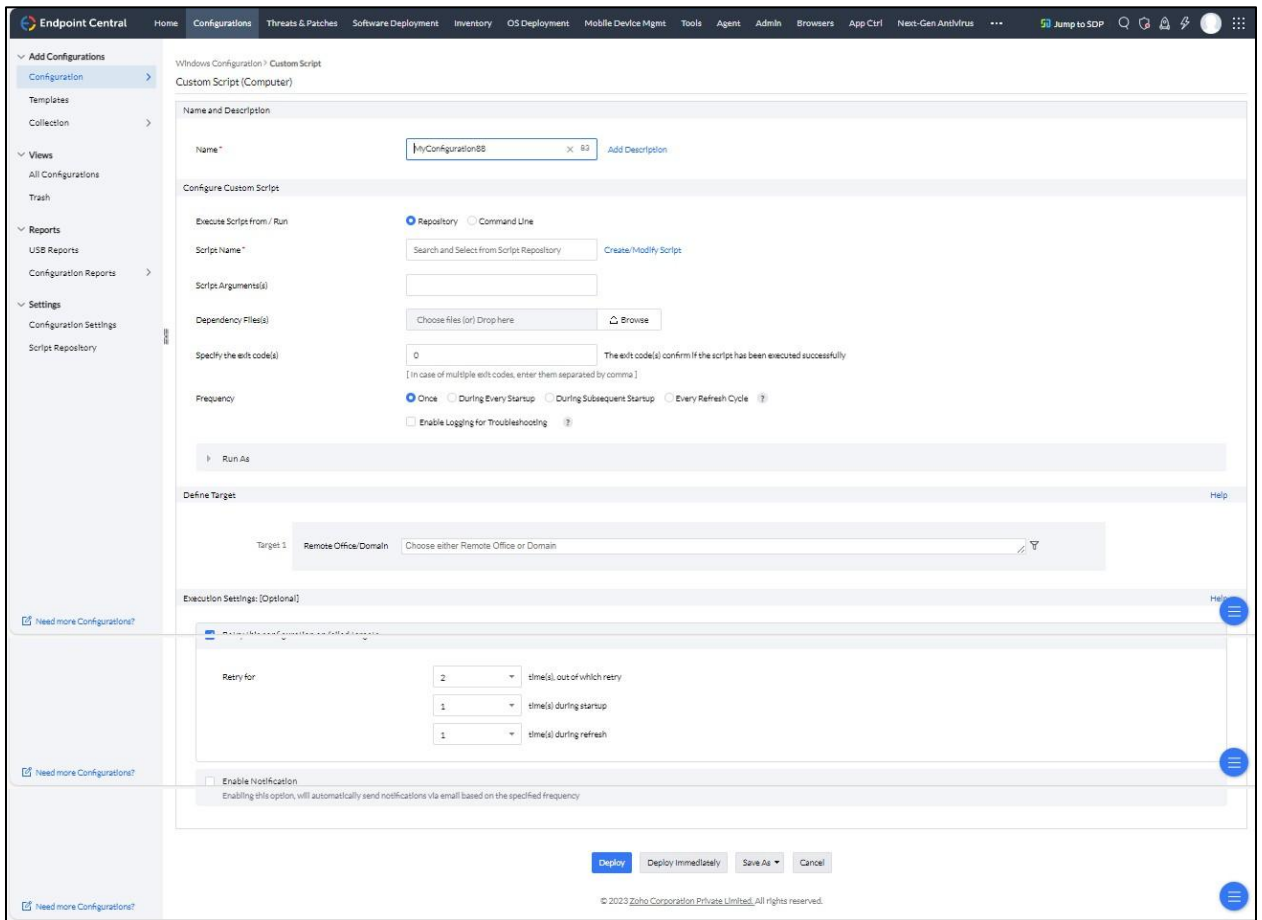

- a. Name: For example, WinAVDeploy
 - b. Execute Script from/Run: Command Line
 - c. Command Line: clagnt64.exe /silent
 - d. Dependency File(s): Select the entire list of files present in the Windows Client extracted build package directory. For example, clagnt.dat and clagnt64.exe.
 - e. Frequency: Once
 - f. Ticket – Select **Enable Logging for Troubleshooting**
 - g. Define Target:
 - Remote Office/Domain: Workgroup
 - Filter Computer based on: Computer - Select Windows Client computer name.
5. Click **Deploy Immediately**.

Mac

Mac Client

Prerequisites

- Administrator must have an account on the Mac client computers with admin privileges.
- Enable Remote Management on the Mac client computers.
- Your administrator computer must have packages installed on it. Packages is a Mac OS application that helps you to create bundle for your payload and installation. To download packages, visit <http://s.sudre.free.fr/Software/Packages/about.html>.
- ManageEngine Agent should be installed on Mac device.
- Mac device should be enrolled with ManageEngine.
- For macOS Catalina and above only, do the following on your Mac system:
 - 1 Open **System Preferences**.
 - 2 Go to **Security & Privacy > Privacy** tab.
 - 3 Click the lock icon and provide password if it is locked.
 - 4 Select **Full Disk Access** in the left pane.
 - 5 Add the following process in the given path and then select the processes in the **Security & Privacy Full Disk Access** window,
/Library/PrivilegedHelperTools/fr.whitebox.packages/packages_dispatcher

Steps

Follow these steps to create the Mac client package:

1. On the Seqrite Endpoint Protection, download UEMREMOTEINST.TAR from the URL.
Note: This tar file is common for EPP Cloud and NG Mac clients. It contains files which are required for creating Mac client packager.
<https://dlupdate.quickheal.com/builds/seqrite/uemcp/en/UEMREMOTEINST.tar>
2. Download Mac client installer (with/without AV) from the EPP server. These builds will be in the TAR format.
3. Rename the Mac client installer as follows:
 - a. Mac client installer (without AV) - MCCLAGNT.TAR
 - b. Mac client installer (with AV) - MCCLAGAV.TAR
4. Extract UEMREMOTEINST.TAR.
5. Copy MCCLAGNT.TAR or MCCLAGAV.TAR to **/UEMREMOTEINST**.

6. Open Terminal.app with user having administrative privileges on the Mac computer and go to the **UEMREMOTEINST** folder.
7. Enter the following commands:
 - `cd ./Remote_Installation/PKG`
 - `sudo sh ./ClientAgentInstaller/CreatePackage.sh`

When the package creation is completed successfully, ClientAgentInstaller.pkg file is created in the **./Remote_Installation/PKG/ClientAgentInstaller/** folder.

Note: Use this **ClientAgentInstaller.pkg** for Mac client deployment using ManageEngine Endpoint Central.

Deploying Profile

Follow these steps to deploy profile with ManageEngine to load product extensions silently and to provide full disk access:


1. Log in to the Manage Endpoint Central Console.
2. Go to **Configuration** and select **Mac**.
3. Select **Custom Configuration**.
4. Enter custom configuration name.
5. Download the profile from <https://download.quickheal.com/builds/segrite/65/en/build/SegriteMacProfile.zip>
6. Extract the downloaded **SegriteMacProfile.zip**, it will contain **SegriteMacProfile10.14.mobileconfig**
7. Click **Browse**. The downloaded **SegriteMacProfile10.14.mobileconfig** into the **Custom Configuration profile**.

Note: *This profile will work on macOS Big Sur and onwards systems.*

8. Define Target:
 - a. Remote Office/Domain: Select the domain name.
 - b. Filter Computer based on: Computer - Select Mac Computer name. (You can find Mac Computer name at > click ellipse> Click 'Agent' > Click 'Mac' chart from OS Platform.)
9. Click **Deploy** Immediately.


Mac Client Deployment with ManageEngine:

1. Log in to the Manage Endpoint Central Console.
2. Go to **Software Deployment**.

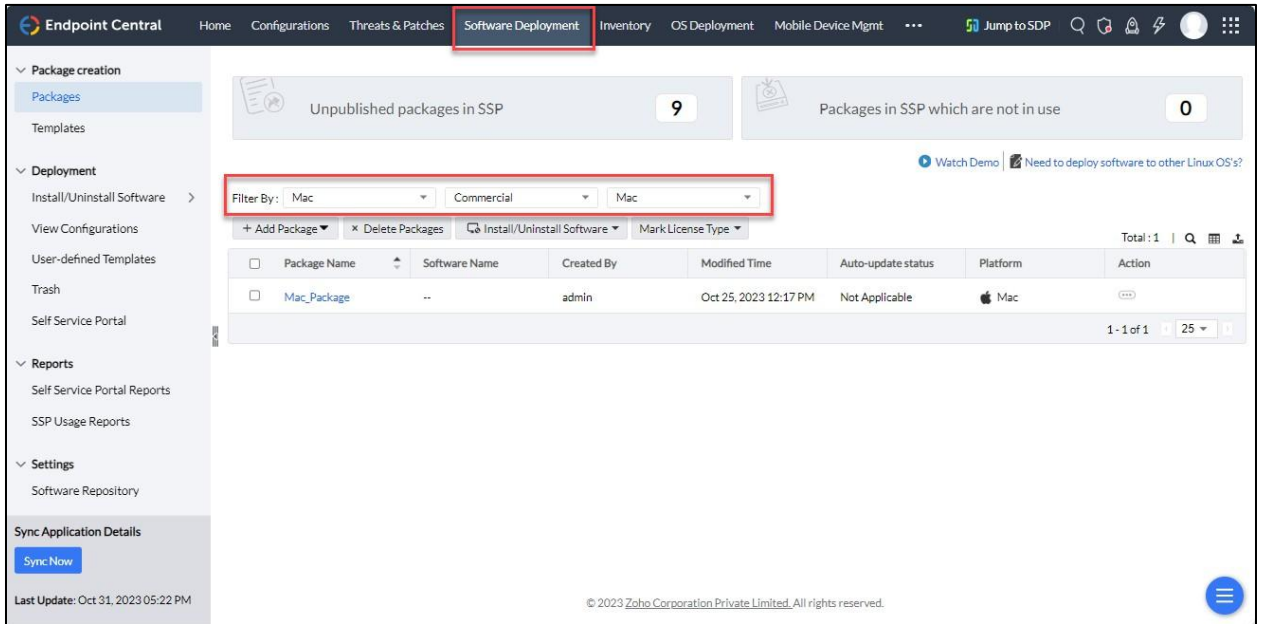


The screenshot shows the ManageEngine Endpoint Central console. The top navigation bar includes 'Home', 'Configurations', 'Threats & Patches', 'Software Deployment' (highlighted), 'Inventory', 'OS Deployment', and 'Mobile Device Mgmt'. The left sidebar has a 'Package creation' section with 'Packages' and 'Templates', and a 'Deployment' section with 'Install/Uninstall Software' selected. The main content area displays 'Unpublished packages in SSP' (9) and 'Packages in SSP which are not in use' (0). A filter bar shows 'Filter By: Mac' selected. Below the filter bar, there are buttons for '+ Add Package', 'Delete Packages', 'Install/Uninstall Software', and 'Mark License Type'. A table lists software packages with columns: Package Name, Software Name, Created By, Modified Time, Auto-update status, Platform, and Action. The table contains one entry: 'Mac_Package' with 'Mac' as the platform. The bottom of the page shows '© 2023 Zoho Corporation Private Limited. All rights reserved.'

3. Click **Add Package**. Select Mac from the drop-down values.

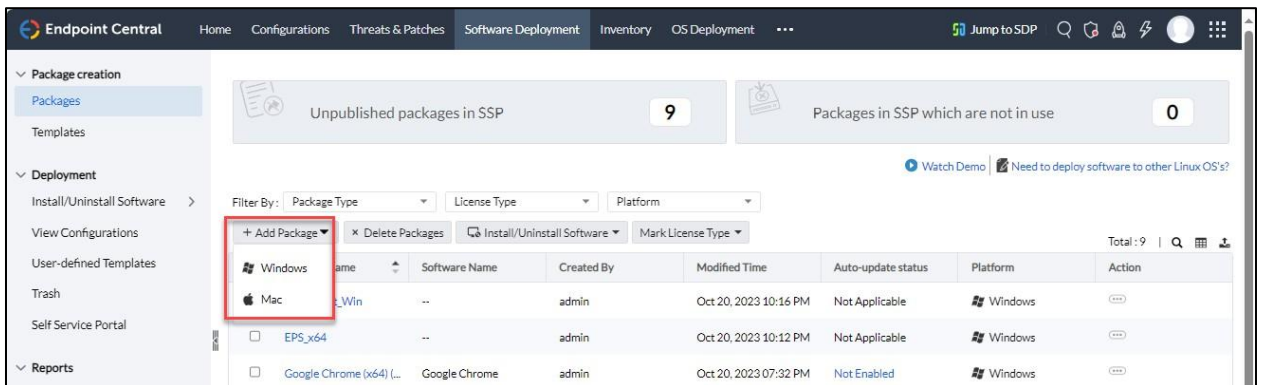

The screenshot shows the ManageEngine Endpoint Central console. The top navigation bar includes 'Home', 'Configurations', 'Threats & Patches', 'Software Deployment' (highlighted), 'Inventory', 'OS Deployment', and 'Mobile Device Mgmt'. The left sidebar has a 'Package creation' section with 'Packages' and 'Templates', and a 'Deployment' section with 'Install/Uninstall Software' selected. The main content area displays 'Unpublished packages in SSP' (9) and 'Packages in SSP which are not in use' (0). A filter bar shows 'Filter By: Package Type', 'License Type', and 'Platform'. Below the filter bar, there are buttons for '+ Add Package', 'Delete Packages', 'Install/Uninstall Software', and 'Mark License Type'. A dropdown menu is open under '+ Add Package', showing 'Windows' and 'Mac' options. The 'Mac' option is selected. Below the dropdown, there is a table of software packages with columns: Package Name, Software Name, Created By, Modified Time, Auto-update status, Platform, and Action. The table contains three entries: 'EPS_x64' (Windows), 'Google Chrome (x64) (...)' (Windows), and 'Google Chrome' (Windows). The bottom of the page shows '© 2023 Zoho Corporation Private Limited. All rights reserved.'

4. Enter the Package Name.

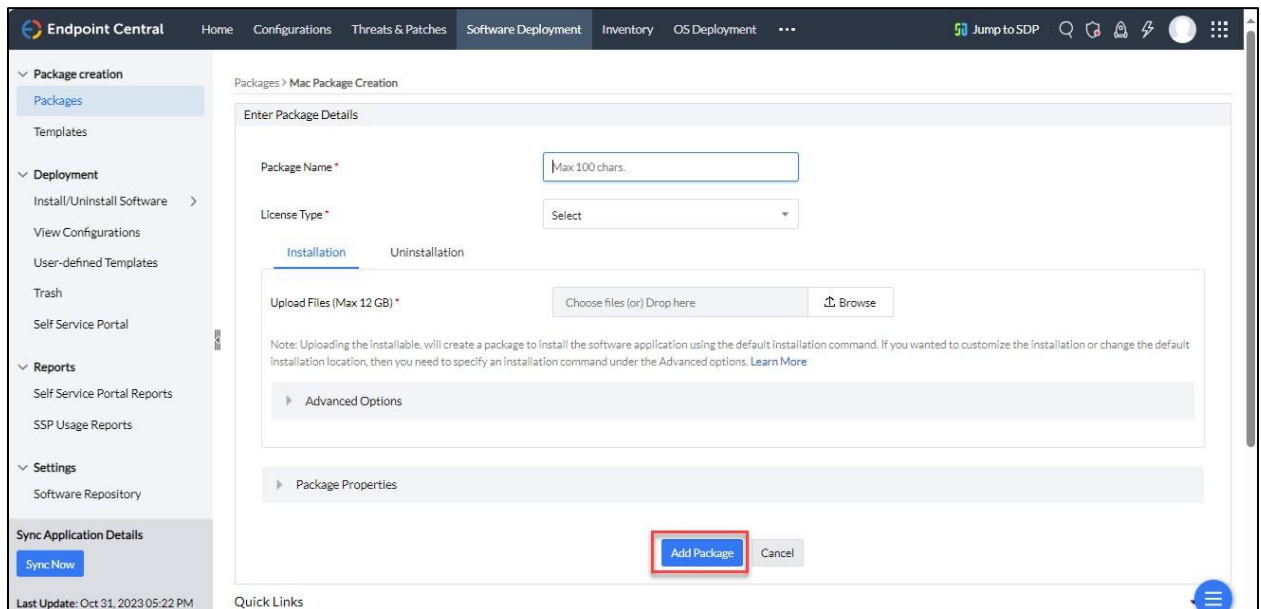


5. Select **Commercial** from the **License Type** drop-down values.


6. Click **Browse** to upload the Mac packager that is, **ClientAgentInstaller.pkg**.

7. Click **Add Package**. The packager gets added.

8. Now, in the left pane, go to **Deployment > Install/Uninstall Software > Mac > Computer Configuration**.

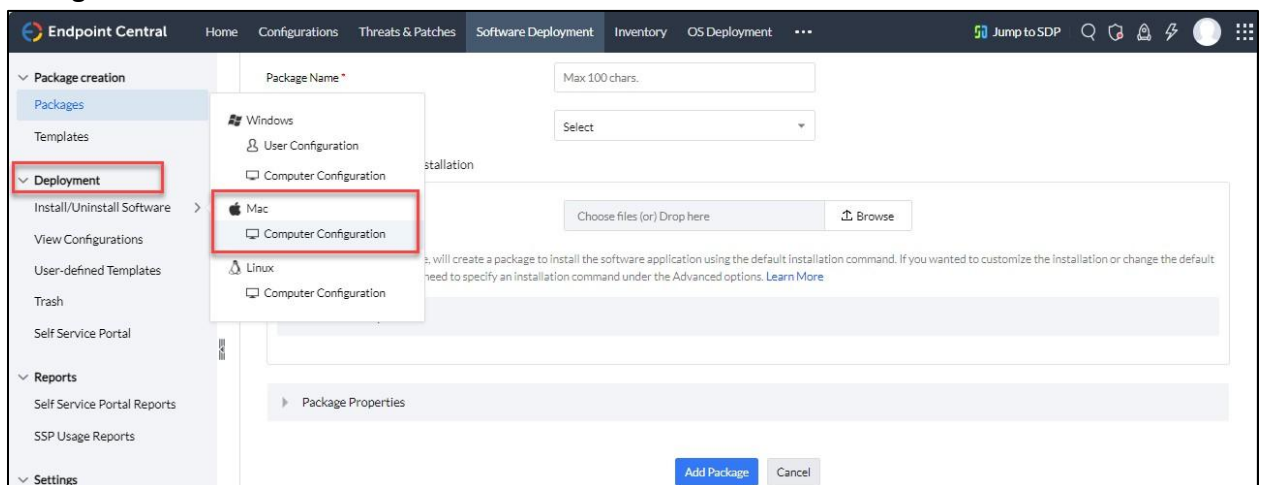

9. Give an appropriate name for configuration.

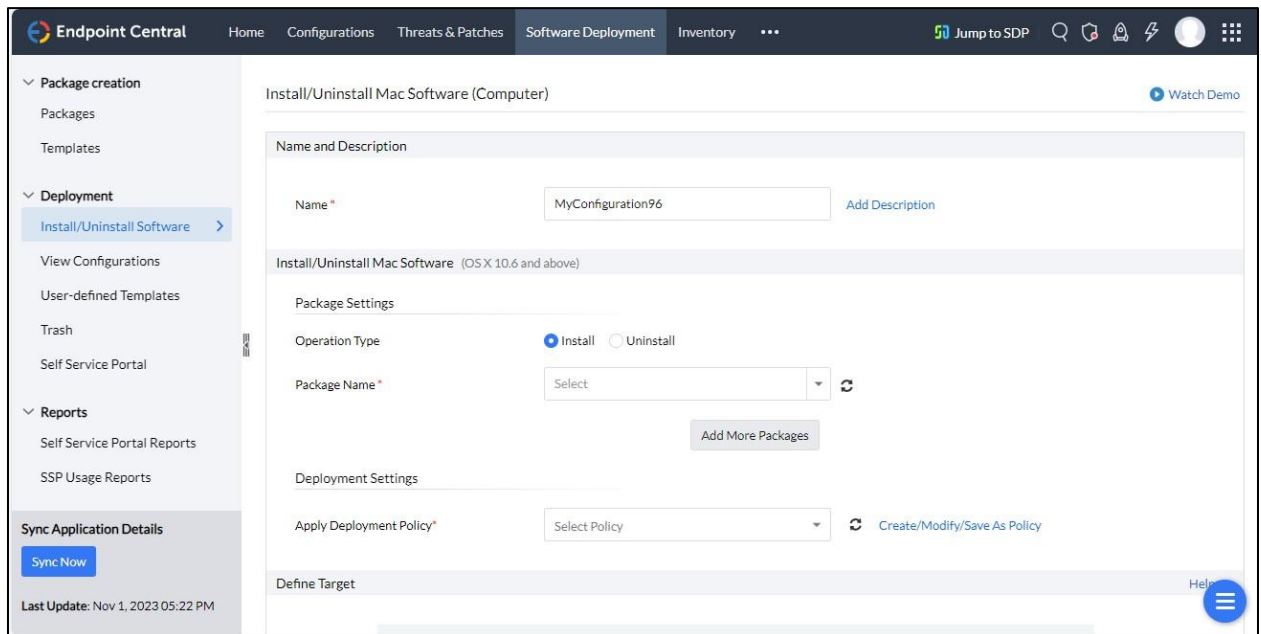

10. Select Operation Type: **Install**.

11. Select the package name that you entered earlier from the Package Name drop-down list values.

12. Select **Deploy any time at the earliest** from Apply Deployment Policy drop-down list values.

13. Define Target:

- a. Remote Office/Domain: Select the domain name.
- b. Filter Computer based on: Computer - Select Mac Computer name. (You can find Mac Computer name at > click ellipse> Click 'Agent' > Click 'Mac' chart from OS Platform.)

14. Click **Deploy Immediately**.

Linux

Linux Client

Follow these steps to download Linux client package:


1. Log in to EPP Console. Go to the Deployment page.
2. Download the Linux Client installer build package from the Deployment page. These builds will be in the TAR format.
3. Extract the .tar file containing buildNumber.txt, clagnt.dat, epslin64.tar.gz, install, readme.txt, and validation files.
4. Rename the install script file as **install.sh**.

Linux Client Deployment with ManageEngine:

Follow these steps to deploy the Linux client using Custom Script method:

1. Log in to the Manage Endpoint Central Console.
2. Go to **Configuration > Linux**.
3. On **Add Configuration** page, click **Custom Script**.

4. On the Custom Script page, enter the following details:

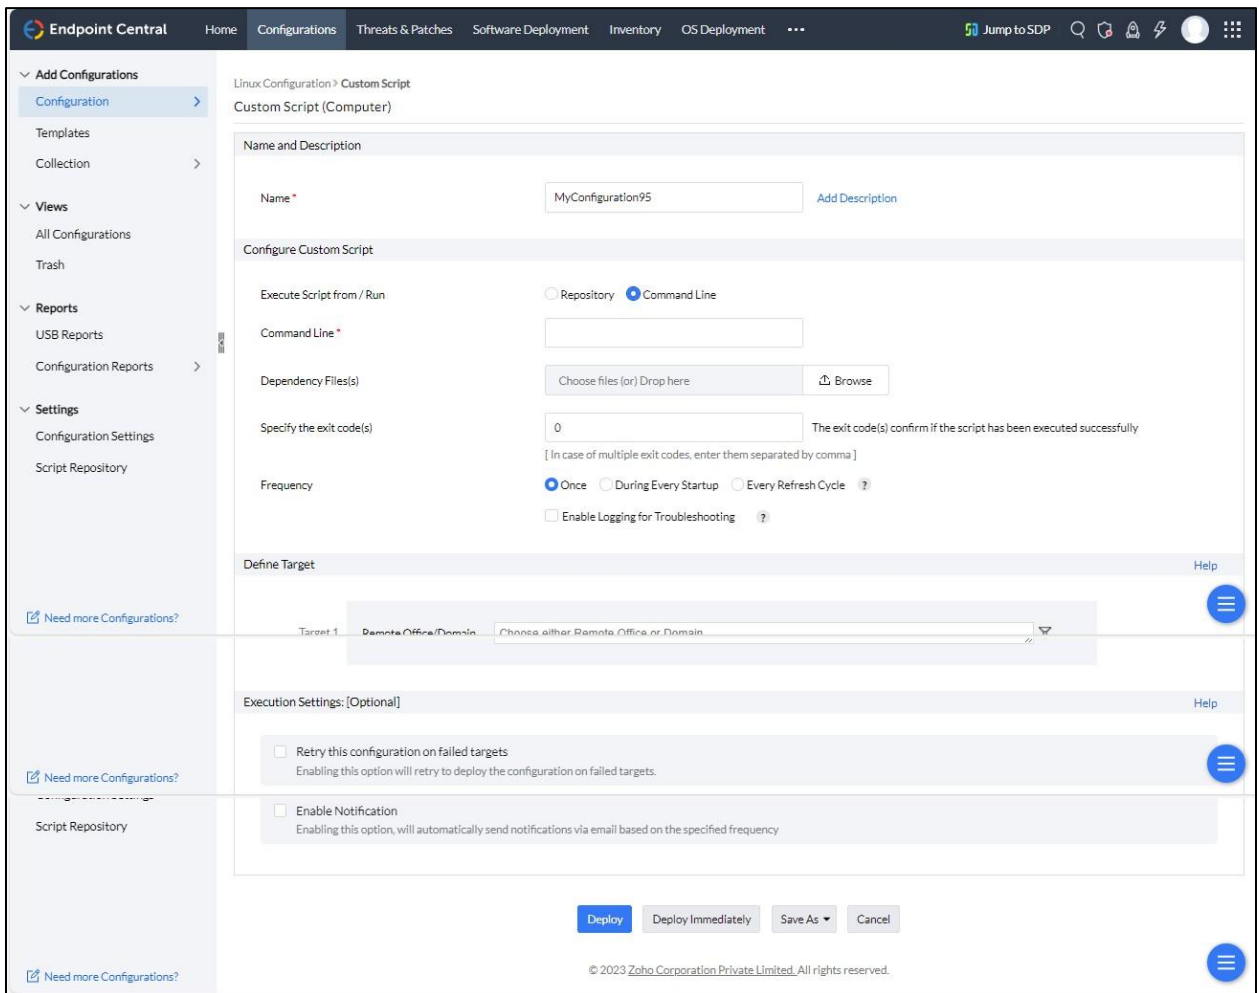

- a. Provide Name: For example, LinAVDeploy
- b. Execute Script from/Run: Command Line
- c. Command Line: `bash install.sh`
- d. Dependency File(s): Select the entire list of files present in the Linux client extracted build package directory. For example, `buildNumber.txt`, `clagnt.dat`, `epslin64.tar.gz`, `install.sh`, `readme.txt`, `validation`.
- e. Frequency: Once
- f. Ticket - Enable Logging for Troubleshooting
- g. Define Target:
 - o Remote Office/Domain: Workgroup
 - o Filter Computer based on: Computer - Select Linux Client host name.

5. Click **Deploy Immediately**.